


Rail Fastening for crane rails on steel

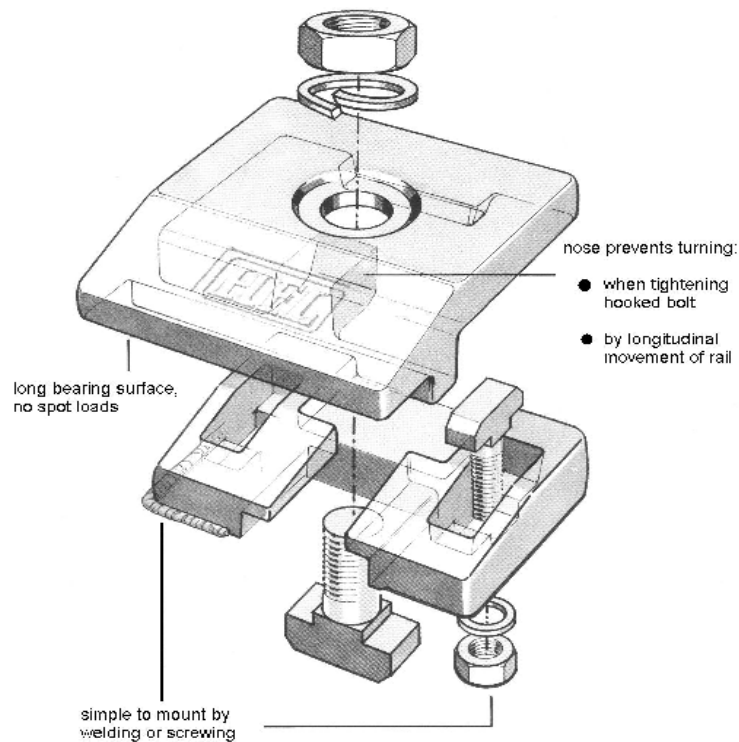


for cranes, conveyors and high bay warehouses.

- Easy mounting
- lateral adjustable, even after years
- Unbearable flat: convenient clearance i.e. for side guide rollers
- draws loads in all directions, even axial
- continuous elastic layer under rail

**We would be pleased to make
you an individual offer.**

Lothes Vario Clip Data Sheet

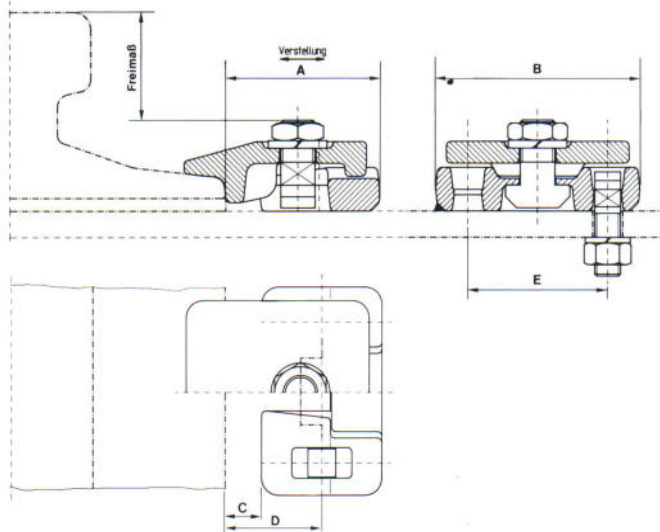

Vario	Rail	space (Freimaß)	adjustment range	A	B	C	D	E	Ø	rubber Layer	clamping Screw	typical lateral force
I	A45	25	±5mm	58	75	13	35,5	52	M10	4	M12	10 kN
	A55	35										
	A65	45										
II	A55	30	±6mm	73	95	17	45	65	M12	6	M16	19,5 kN
	A65	40										
	A75	50										
III	A75	40	±7,5mm	90	120	20	55	80	M16	6	M20	31 kN
	A100	50										
	A120	60										

All dimensions in mm.

The lateral forces are calculated per fastening point at the clip, in the case of continuous support.
 The forces are only orientation values and shall not replace a structural certificate.